

DIGITAL DOOR LOCK

NO.2430 Built-In type Spring Latchbolt Lock with
INSIDE HANDLE

NO.2435 Built-In type Spring Latchbolt Lock with
HOLDBACK DEVICE and INSIDE HANDLE

Special Instructions

1. Read "INSTALLATION INSTRUCTIONS" sheet (including part II – confirming "HAND" of door and ensuring pin is in correct position in outside body of Digital Door Lock.)
2. Take inside body (figure A),
At present it is set for right hand door.
To change to left hand door remove blue screw and insert into the right hand hole tighten sufficiently. (figure B)
3. Follow "INSTALLATION INSTRUCTIONS".
4. To use SNIB HOLD BACK on model No. 2435 bring handle to horizontal position and slide SNIB toward edge of door.
– Slide SNIB away from door edge for normal operation.

FIG. A


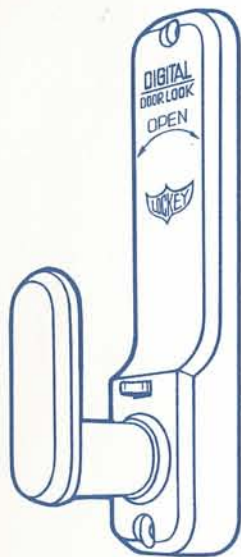


FIG. B

back side of inside body

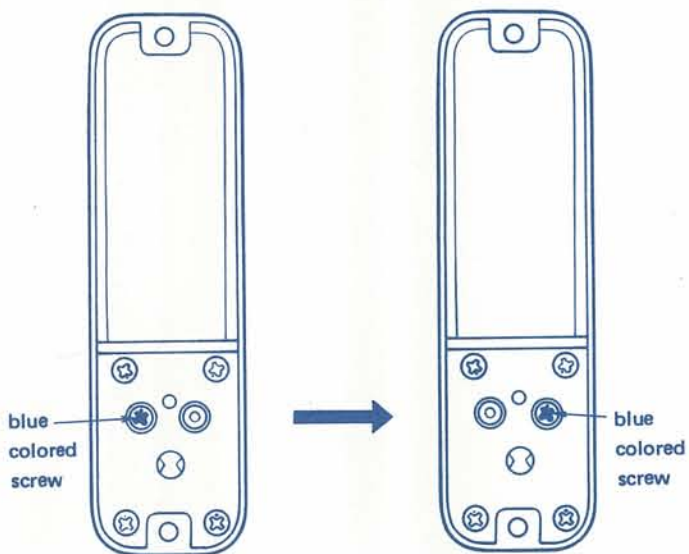

HOW TO DISCONNECT SNIB HOLDBACK FACILITY

1. Hold back body of Lock in horizontal position, remove 4 silver screws and lift off the cover plate.

2. Take out the ballbearing, spring and small top plate only.



3. Replace the cover and secure with the 4 silver screws.